

# XTREME POWER CONVERSION XPDU

Rack Power Distribution // 15A to 50A

For more information, visit [www.xpcc.com/xpdu](http://www.xpcc.com/xpdu)



## Rack power distribution solutions designed to meet the needs of any data center or wiring closet

Improve data center power distribution with the XPDU family, a series of power distribution units that combine the key features needed to manage high density equipment racks or wiring closets.

XPDU's deliver reliable power distribution to multiple units of connected equipment by adding up to 24 receptacles to your rack space. These PDUs compliment your current power source and are compatible with any manufacturer's UPS.

### PRODUCT SNAPSHOT

- › Available 120V models: 15A, 20A
- › Available 208V & 240/120V models: 30A, 50A
- › Vertical and horizontal configurations
- › UL, cUL, FCC, CE (varies by model)
- › 3 year full warranty (USA and Canada)

### FEATURES

**Plug and power**—XPDU's provide up to 24 receptacles for power distribution

**Receptacle control**—switched model includes Web/SNMP interface with monitoring software and on/off control of up to 8 receptacles

**Hardwired models**—input pigtail available with Basic XPD3 models

**NEMA plugs and IEC inlet**—multiple input configurations available

**Branch circuit protection**—UL1077 listed output circuit breaker

**Mounting options**—wall, rack, and floor mounting options available


**Agency listed**—UL, cUL, FCC, CE listings available (varies by model)

**Transformer PDU**—provides 208V to 120V step down

# MODEL SELECTION GUIDE

For more information, visit [www.xpcc.com/xpdu](http://www.xpcc.com/xpdu)

MODEL NUMBER	Input Power Connection	Outlets	Voltage	Circuit Breaker	Dimensions (W x D x H)	Weight
<b>Switched PDU</b>						
XPD0815SL	Detachable 10 ft, 5-15P	(8) 5-15/20R	120V	15A	17 x 3.75 x 1.7 in (1U)	4.4 lbs
SPD-0215	IEC C14 inlet	(2) 5-15R	120V	N/A	5.4 x 6.0 x 2.5 in	2.0 lbs
<b>Transformer PDU</b>						
XPD-IT60A	3 ft, L6-30P	(1) L6-30R + (12) 5-15/20R	208V input 120V output	30A	19.0 x 18.0 x 3.5 in (2U)	137 lbs
XPD-AT15A	Detachable 3 ft, IEC C14	(8) 5-15R front + (8) 5-15R rear	208V input 120V output	15A	19.0 x 10.5 x 3.5 in (2U)	19.7 lbs
<b>Basic PDU - 15A &amp; 20A models</b>						
XPD815HV	12 ft, 5-15P	(8) 5-15R	120V	15A	17 x 3.75 x 1.7 in (1U)	2.6 lbs
XPD1415HV	12 ft, 5-15P	(14) 5-15R	120V	15A	17 x 3.75 x 1.7 in (1U)	3.5 lbs
XPD1420HV	12 ft, 5-20P + L5-20P	(14) 5-20R	120V	20A	17 x 3.75 x 1.7 in (1U)	4.8 lbs
XPDU-IEC	IEC C20 inlet	(2) IEC C19 + (10) IEC C13	230V	15/20A	17 x 3.75 x 1.7 in (1U)	4.4 lbs
<b>Basic PDU - 30A &amp; 50A models</b>						
XPD24C13V	6 ft, L6-30P	(24) C13	208V	30A	66.0 x 1.8 x 1.8 in	12.0 lbs
XPD31	6 ft, L6-30P	(2) L6-30R + (2) L6-20R + (4) 6-15/20R	240V	30A	19.0 x 4.7 x 3.5 in (2U)	9.0 lbs
XPD32	6 ft, L6-30P	(2) L6-30R + (4) L6-20R	240V	30A	19.0 x 2.4 x 3.5 in (2U)	7.5 lbs
XPD33	6 ft, L6-30P	(4) IEC C19 + (8) IEC C14	240V	30A	19.0 x 2.4 x 3.5 in (2U)	6.0 lbs
XPD34	6 ft, L14-30P	(2) L6-30R + (4) L6-20R + (12) 5-20R	240/120V	30A	19.0 x 4.7 x 3.5 in (2U)	9.5 lbs
XPD35	Pigtail	(2) L6-30R + (4) L6-20R	240V	50A	19.0 x 2.4 x 3.5 in (2U)	7.0 lbs
XPD36	Pigtail	(4) IEC C19 + (8) IEC C14	240V	50A	19.0 x 2.4 x 3.5 in (2U)	6.8 lbs
XPD37	Pigtail	(2) L6-30R + (4) L6-20R + (12) 5-20R	240/120V	50A	19.0 x 4.7 x 3.5 in (2U)	10.0 lbs
<b>Value PDU</b>						
XPS1215HVP	6 ft, 5-15P	(12) 5-15R	120V	15A	17 x 1.5 x 1.7 in (1U)	1.4 lbs

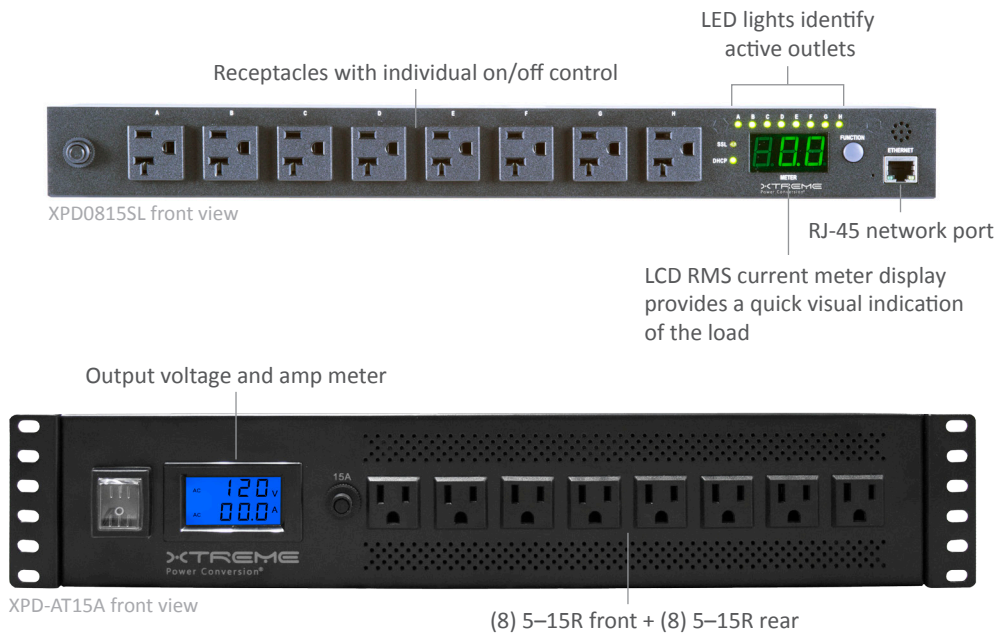

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

XPC EMEA / Rotterdam, NL / emea@xpcc.com

www.xpcc.com

©2016 Xtreme Power Conversion Corporation. All Rights Reserved. XPDU.01U (Rev 8/22/16)