

XTREME POWER CONVERSION A60

Standby UPS // 120VAC

For more information, visit www.xpcc.com/a60



Affordable, reliable power protection for valuable home and small business electronics

Power and protect your critical electronics and maintain your internet connection during power outages. Xtreme Power A60 UPS keep you connected by providing battery backup so you can continue phone calls, checking emails, and maintain home automation and security systems.

In addition, the A60-850 includes a USB charging port to charge and power your mobile devices during power outages.

For Lithium Ion UPS reference the J60 at www.xpcc.com/j60

PRODUCT SNAPSHOT

- › Available models: 550VA, 850VA
- › Compact size and lightweight design
- › Floor, desk, or wall mount
- › UL, cUL, Energy Star, TAA Compliant
- › 3 years electronics, 3 years battery warranty (USA and Canada)

FEATURES

Compact design—allows for horizontal or vertical placement; keyholes enable this lightweight UPS to be conveniently mounted on a wall

Surge Protection —guard your electronics against lightning, surges and spikes

Auto restart—after full battery discharge, the A60 automatically restarts when utility power returns

USB Communications—USB port enables plug and play communications between servers, desktops, and the UPS

Touch LCD — provides vital monitoring and precise information (850VA)

USB Charging Port — USB port allow you to charge your mobile devices during power outage

\$25,000 load protection policy—protection against damaged connected equipment

MODEL SELECTION GUIDE


For more information, visit www.xpcc.com/a60

| MODEL NUMBER | | A60-550 | A60-850 |
|--------------------------|----------------------------|--|---------------------|
| CAPACITY | Power rating | 550VA (330W) | 850VA (500W) |
| INPUT | Voltage | 110/120VAC | |
| | Frequency | 50/60Hz auto-sensing | |
| OUTPUT | Voltage | 110/120VAC | |
| | Waveform | Simulated sine wave | |
| | Frequency | 50Hz \pm 1Hz or 60Hz | |
| | Transfer time | 2–6ms | |
| BATTERY | Battery type | Sealed, maintenance free lead acid | |
| | Battery quantity and size | (1) 12V 5AH | (1) 12V 5AH |
| | Recharge | 8 hours to 90% capacity | |
| PHYSICAL | UPS dimensions (W x D x H) | 6.2 x 12 x 3.7 in | |
| | UPS weight | 6 lbs | 7.2 lbs |
| | Line cord | 6 ft, 5-15P | |
| | Receptacles | (10) NEMA 5-15R receptacles (5 battery back up + 5 surge only) | |
| | USB charging port | N/A | USB A-type 5V, 2.4A |
| ENVIRONMENT | Operating temperature | 32–104°F (0–40°C) | |
| | Humidity | 0–90% | |
| | Altitude | 11,500 ft above sea level | |
| INDICATORS & ALARMS | Display | 3 LED's | Touch LCD |
| | Data Line Protection | N/A | RJ45 |
| APPROVALS | | Certified to UL-1778, cTUVus, RoHS, TAA | |
| WARRANTY | | 3 years electronics, 3 years battery (USA and Canada) | |
| COMMUNICATIONS INTERFACE | | USB | |
| INCLUDED IN BOX | | USB Cable and User Manual | |

BATTERY RUNTIMES

| System Load | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|
| A60-550 | 60 | 27 | 15 | 10 | 8 | 6 | 4.5 | 3 | 2.2 | <1 |
| A60-850 | 45 | 20 | 12 | 7.3 | 6 | 4 | 2.5 | 2 | 1 | <1 |

(Runtimes are shown in minutes and will vary based on battery age and site conditions.)

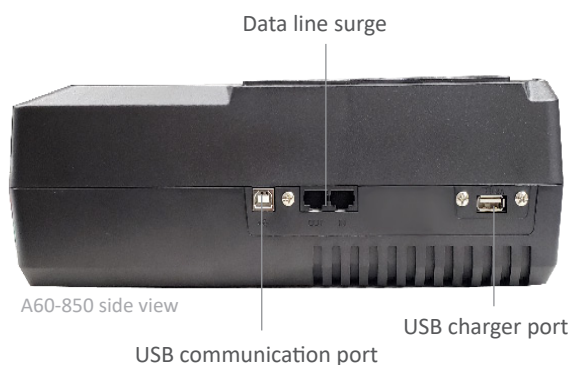

X-TREME
Power Conversion®

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

www.xpcc.com

©2020 Xtreme Power Conversion Corporation. All Rights Reserved. XST.01U (Rev 3/22/21)