

# XTREME POWER CONVERSION XST

Standby UPS // 120VAC

For more information, visit [www.xpcc.com/xst](http://www.xpcc.com/xst)



## Safeguard your computer from power outages with dependable power protection

The compact XST is a single phase standby UPS designed to deliver power protection to small routers, switches, desktop PCs, VoIP equipment, phone systems, and point of sale equipment. A vital addition to any home office, it enables graceful shutdown of equipment during a longer power outage.

### PRODUCT SNAPSHOT

- › Available models: 400VA, 600VA, 800VA
- › Compact size and lightweight design
- › RoHS, TAA compliant
- › Floor, desk, or wall mount
- › Primary applications: home or small office, desktop computers, routers, switches, and telecom closets
- › 2 years electronics, 2 years battery warranty (USA and Canada)

### FEATURES

**Compact design**—allows for horizontal or vertical placement; keyholes enable this lightweight UPS to be conveniently mounted on a wall

**Ease of use**—plug and play functionality means the UPS is ready to start backing up your equipment right out of the box

**Auto restart**—after full battery discharge, the XST automatically restarts when utility power returns

**Full protection**—discharge, overcharge, short circuit, and thermal protection

**Cold start function**—UPS can start on batteries

**USB communications**—USB port available on XST-600 and XST-800 models; enables plug and play communications between servers, desktops, and the UPS; offers seamless installation with Windows, Mac, Solaris, and Linux operating systems

**\$25,000 load protection policy**—protection against damaged connected equipment


**XTREME**  
Power Conversion®

Protect your business.

# MODEL SELECTION GUIDE

For more information, visit [www.xpcc.com/xst](http://www.xpcc.com/xst)

MODEL NUMBER		XST-400	XST-600	XST-800
CAPACITY	Power rating	400VA (240W)	600VA (360W)	800VA (480W)
INPUT	Voltage	120VAC		
	Frequency	60Hz		
OUTPUT	Voltage	120VAC		
	Waveform	Sine wave (normal), simulated sine wave (battery mode)		
	Frequency	60Hz ± 1Hz		
	Transfer time	2–6ms		
BATTERY	Battery type	Sealed, maintenance free lead acid		
	Battery quantity and size	(1) 12V 4.5AH	(1) 12V 7AH	(1) 12V 9AH
	Recharge	8 hours to 90% capacity		
PHYSICAL	UPS dimensions (W x D x H)	3.2 x 8.9 x 8.1 in (vertical stand position)		
	Shipping dimensions	4.7 x 11.4 x 11.0 in		
	UPS weight	4.8 lbs	5.9 lbs	6.8 lbs
	Shipping weight	5.6 lbs	6.7 lbs	7.6 lbs
	Line cord	5 ft, 5–15P		
	Receptacles	(4) NEMA 5–15R		
ENVIRONMENT	Operating temperature	32–104°F (0–40°C)		
	Humidity	0–90%		
	Altitude	11,500 ft above sea level		
INDICATORS & ALARMS	AC mode	Blue LED ON		
	Battery mode	Blue LED flashes every 10 sec; audible alarm flashes every 10 sec		
	Low battery	Blue LED flashes every sec; red LED ON; audible alarm flashes every sec		
	Fault	Red LED ON; continuous audible alarm		
	Over temperature protection	Red LED flashes every 0.5 sec		
WARRANTY	2 years electronics, 2 years battery (USA and Canada)			
COMMUNICATIONS INTERFACE	None		USB	
INCLUDED IN BOX	User manual		ViewPower CD, USB cable, user manual	

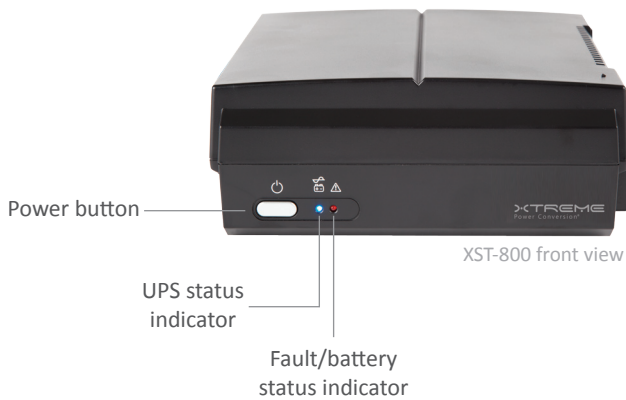

**X-TREME**  
Power Conversion®

Protect your business.

XPC USA / Denver, CO / sales@xpcc.com

XPC EMEA / Rotterdam, NL / emea@xpcc.com

www.xpcc.com

©2020 Xtreme Power Conversion Corporation. All Rights Reserved. XST.01U (Rev 1/15/20)